

# CORINTHIAN J70 WORLD CUP



Dear J/70 sailor,

at the Corinthian World Cup in Riva del Garda we will have an official equipment inspection after the end of each race, to check if equipment complies with the class rules; boats may be hauled for this.

J/70 Class Rules are CLOSED CLASS RULES WHERE IF IT DOES NOT SPECIFICALLY SAY THAT YOU “MAY” THEN YOU “SHALL NOT. As sample of this, a cleat to keep the gennaker halyard is not permitted [CR C5.2.b.8], nor a use of a second ferrule (ring) installed on the end of the backstay leg [CR C.9.1.(m)] or even more, the use of load cells.

Before to modify your equipment be sure you can do it; read carefully the [Class Rules](#), the [Building Specification](#) and the [FAQ](#) , available on the J/70 Int class website. ; an infringement of the class rules will be grounds for protest.

Boats without a valid Manufacturer Declaration shall contact by email the J/70 Class ([howell@j70office.com](mailto:howell@j70office.com)) or the event measurer Egidio Babbi ([babbiegidio@gmail.com](mailto:babbiegidio@gmail.com))

Preparing your boat for the next event, in the hope that you will verify in advance your equipment, please find attached a not exhaustive list of the checks we may do.

- J/70 Class sticker (2023 = GREEN) on the starboard transom [ CR B.2.1 ]
- Personal Flotation Device (PFD) for each crew member. [ CR C.4.1(a) ] ;Allowed types: ISO 12402-5 (Level 50), USCG Type III, or an equivalent.
- Anchor with chain and rode. [ CR C.5.2(a)(1)]; Anchor + chain together must weigh 5kg minimum. The chain must be at least 750mm to 1m long. The anchor rode must be at least 8mm diameter and 40m in length). The anchor, chain and rode must be connected together and in readily-deployable condition.
- Bucket [ CR C.5.2(a)(2) ], 9 liter minimum.
- Manual Bilge Pump [ CR C.5.2(a)(3) ] ; Pump must be either permanently installed by manufacturer (Europe-built boats) or have a discharge hose that is long enough to reach into cockpit from the bilge (US-built boats) and shall be in working order.
- Marine First Aid Kit [ CR C.5.2(a)(4) ] - not expired, Marine = waterproof,
- Main Companionway Hatch [ CR C.5.2(a)(5) ] ; The one that came with the boat - fiberglass.
- Main Companionway Dropboard [ CR C.5.2(a)(6) ] ; The one that came with the boat - smoked plexiglass.
- Operational VHF Radio [ CR C.5.2(a)(7) ]
- Throwable Flotation Device [ CR C.5.2(a)(8) ]
- Fire Extinguisher [ CR C.5.2(a)(9) ]
- Engine [ CR C.5.3(a)(1) ] Engine must function and must weigh at least 12kg without fuel; and shall be functional: means you shall have enough fuel to go and come from the regatta area to the harbour.
- Manufacturers Declaration available on board [ CR C.5.2(a)(10) ] ; Boat must show copy of MD (digital copy on a phone or tablet is okay).
- Sprit Pole Length [ CR C.9.4 ] ; Maximum length: 1495mm from stem of hull to outer end of pole, extended as far as possible with sprit control line.
- Lifelines secured with turnbuckles or lashed with 3mm min diameter polyester or Polytech covered Dyneema (or equivalent) which pass around the principal portion of the pushpit and/or the forward attachment point at least three times. Lashings are taped to secure knots. [ CR C.7.2(a)(2) ]


How pass around the pulpit:



This is a sample of Polytec covered Dyneema:



- Lifelines are made of wire and meet the tension requirement. [ CR C.7.2(a)(1) ]
- Safety lines must not deflect more than 25mm with a force of 2kg. | Quick tip: pulling lashings as tight as possible and/or tightening to a LoosGauge reading of at least '8' is approximately correct.
- Mainsheet strop length compliant. [ J/70 Building Specification, Line 21a. ] 434mm (minimum) to 504mm (maximum) | Measured dimension is from the bottom of the boom to the edge of the sheave of the top mainsheet block.

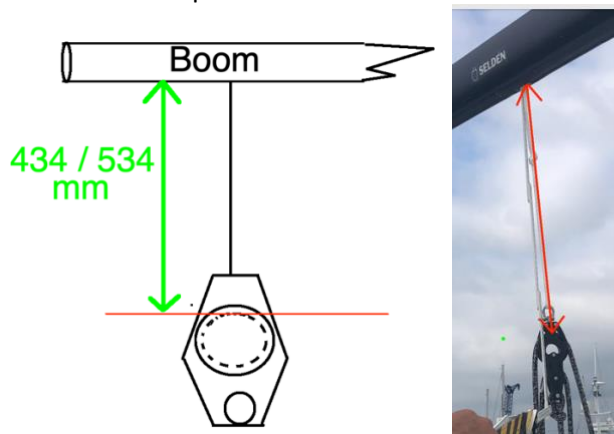

- 
- 
- No removal of or adding blocks or other fittings other than those specifically allowed in CR C.7.2, CR C.9.1 and/or the J/70 Builder Specification. A maximum of five ratchet blocks are allowed: two jib blocks, two spinnaker blocks, and one for the mainsheet.
- Running rigging diameters compliant [ CR F.4.1 ]
- Purchase systems compliant [ CR F.4.2 ]
- Corrector weights – if recorded on MD - present and located correctly. [ CR H.2 ]
- Sails shall be certified by an Official Measurer or by a manufacturer licensed under World Sailing In-House Certification. If it is not certified, contact the event measurer Egidio Babbi ([babbiegidio@gmail.com](mailto:babbiegidio@gmail.com))
- Be careful to put the bow number to the correct position as indicated in the Notice of Race. The position refer to the number, NOT to the sticker edge!!!

Remember:

J/70 Class Rules are CLOSED CLASS RULES  
WHERE IF IT DOES NOT SPECIFICALLY SAY THAT YOU "MAY"  
THEN YOU "SHALL NOT"

End.

Egidio Babbi  
Chief Event Measurer  
